



## Technical Specifications



<b>Connectors</b>	CHAdeMO and CCS
<b>Power</b>	Up to 50kW
<b>Supply voltage</b>	400 - 480 V AC 3ø 55kW
<b>Supply frequency</b>	50 – 60 Hz
<b>IP Rating</b>	IP65
<b>Efficiency</b>	>93%
<b>Power factor</b>	0.99
<b>Operating temperature</b>	-35C to 50°C
<b>Network connection</b>	3G, GSM and Gigabit Ethernet
<b>RFID</b>	MIFARE ISO/IEC14443A/B, ISO/IEC15693, ISO/IEC18000-3, FeliCa, NFC, EMV 2.0
<b>Communication Protocol</b>	OCCP 1.5
<b>Weight</b>	165 kg
<b>Electrical protection</b>	Short circuit; Over voltage; RCD
<b>Dimensions</b>	2000(H) x 750(W) x 330(D) mm
<b>Shipping</b>	24 units per 20' container
<b>Shipping weight</b>	300kg/661lb
<b>Certification</b>	UL, CEC, CHAdeMO,

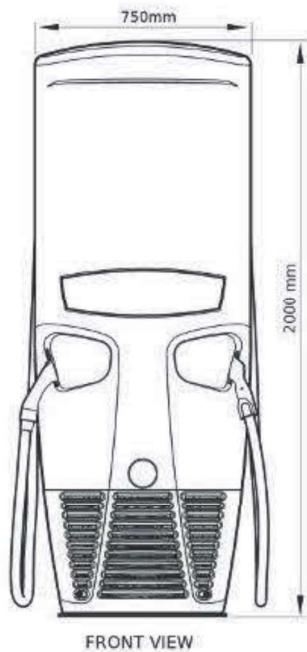